

EAN: 5905339902054

Starter kit for a 1-phase track system
Kanlux 45925 ALTEAR SET 1,5M3S W










Date of issue: 08.07.2026, 14:20
We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.
Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

EN

PRODUCT PARAMETERS	
Rated voltage [V]	220-240 AC
Rated frequency [Hz]	50
Rated current [A]	10
Maximum power [W]	3 x max 10
Cap (Light source)	GU10
Light source	PAR16
Light source included	no
Place of application	Indoors
IP class	20
Replaceable light source	yes
Feeder included	0
Maximum permitted load [kg]	4
The fixture is movable horizontally [°]	330
The fixture is movable vertically [°]	90

DIMENSIONS AND MOUNTING	
Height [mm]	75
Width [mm]	95
Length [mm]	1510
Place of assembly	na szynę TEAR

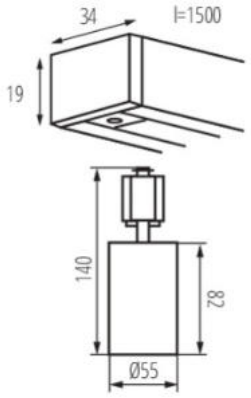

MATERIAL AND CONSTRUCTION	
Colour	white
Class of protection against electric shock	I
Minimum distance from the illuminated object	0,5m
Ambient temperature range to which the product can be exposed	5÷25

ADDITIONAL INFORMATION

5 years Warranty under the terms of the warranty statement, available on our website

LOGISTICS	
Unit of measurement	unit
Packaging method	10
Number of units in the secondary packaging	1
Number of units in the packaging	10
Net unit weight [g]	1014
Grammage [g]	1546
Gross unit weight [g]	1436
Length of a unit pack [cm]	9.5
Width of a unit pack [cm]	7.5
Height of a unit pack [cm]	151
Weight of a cardboard box [kg]	15.46
Width of a cardboard box [cm]	21
Height of a cardboard box [cm]	39.5
Length of a cardboard box [cm]	153
Volume of a cardboard box [m^3]	0.126914

Date of issue: 08.07.2026, 14:20
We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.
Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

EN