

PHILIPS

Ledinaire
Surface-mounted
SM060C

Scan me!

DOWNLOAD

50Hz
60Hz

220V
240V

LIFE
L80
50k hrs

LIFE
L70
75k hrs

IP20

IK03

Max.
40 °C
Min.
10 °C

GLOW
WIRE
650 °C

	Luminaire luminous flux (lm)	CCT (K)	Driver	Light source of energy efficiency class	System power (W)	
SM060C G2 34_40S/840 PSU W20L120 NOC	3400/4000	4000	PSU	D	28/33	2.87
SM060C G2 34_40S/840 PSU W20L120 OC						

Dimensions in mm

Inrush current

	LED34S	LED40S
Electrical characteristics		
I _{max} (A)	17.5	17.5
T _{ref} (μs)	120	120
MCB	Luminaires Max.	
B-10A	40	40
B-16A	60	60
C-10A	45	45
C-16A	70	70

- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.

- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

- Luminaire must not be used or stored in corrosive environment where hazardous materials such as Sulphur,Chlorine, Phthalates, etc, are present.

- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE
DEVICES


© 2026 Signify Holding All rights reserved

Printed in China
Data subject to change without notice
Keep for future reference : www.philips.com/lighting


1/3



Push-in connectors

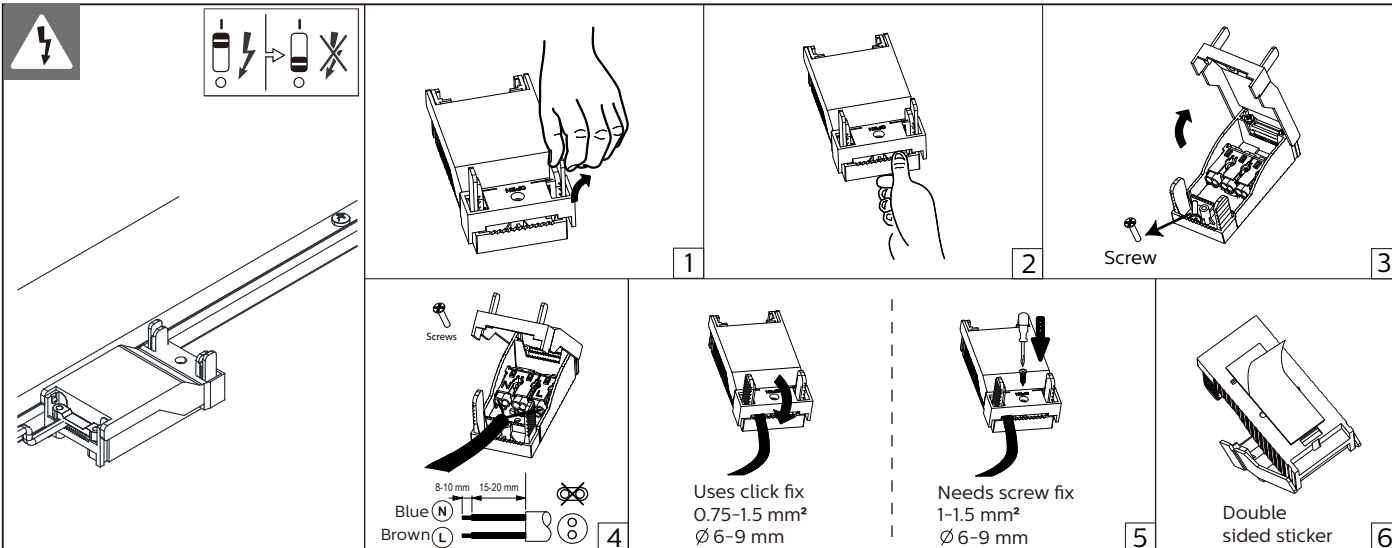

MultiLumen selection on driver

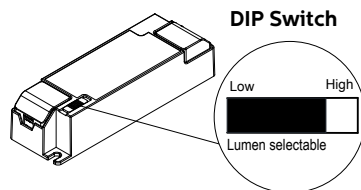


PSU	4.000 K	
PIN	Lumen	Power
Low	3.400 lm*	28 W*
High	4.000 lm	33 W


* Default setting




Surface mounted

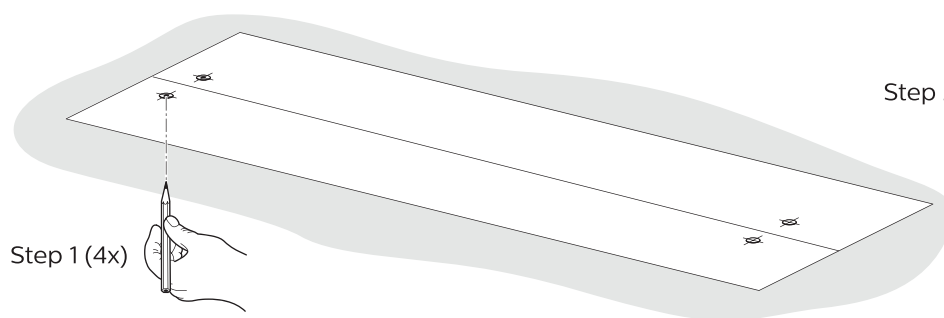

Step 2 (4x)








1

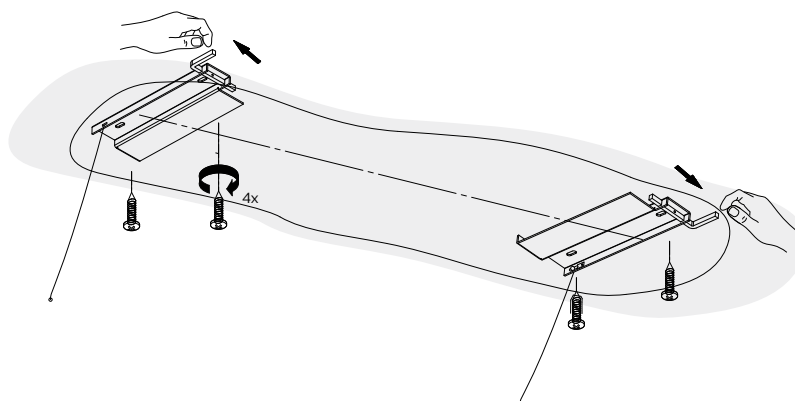

2

3

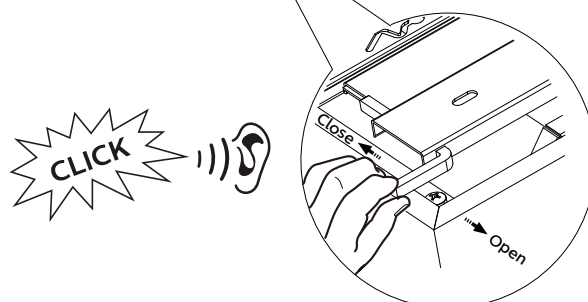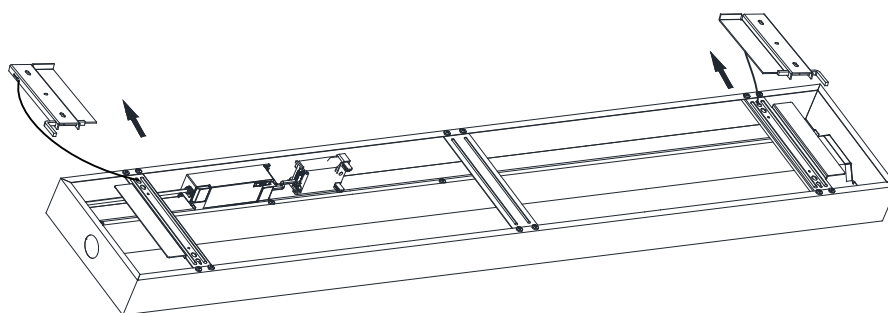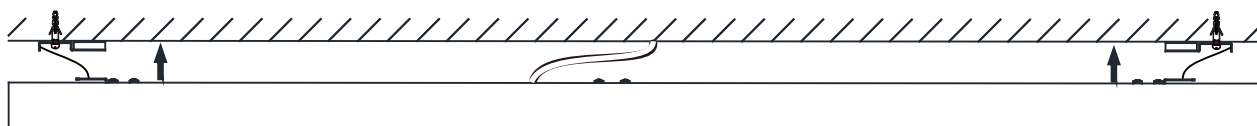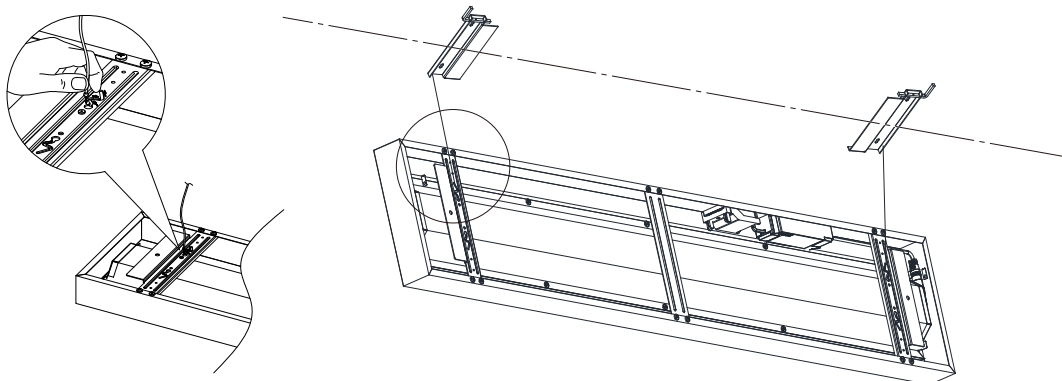

4