


- Do not look directly at led light for a long time to avoid physical discomfort.
- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire shall be replaced.
- Above average concentration of sulfur affects the useful lifetime of the product. E.g: Light color changes from white to yellow.
- For use in environments where an accumulation of conductive dust on the luminaire may be expected.
- Do not install the luminaire under water.
- Do not install the luminaire in refrigeration house.
- This luminaire can be installed in ammonia environment, typically in livestock applications.
- Do not install the luminaire in the environment where vibration exists.




- (\*) For outdoor use:
  - Valid only for PSU luminaires. PSD and WIA versions are not suitable for outdoor operation.
  - PSU luminaires can be installed only under semi-shaded area or the environment blocked by glass. It is not recommended to use it directly exposed to direct sunlight!
  - For outdoor operation at a building: allowed only when all its cables run indoor, with a maximum distance of 10 meters.
- (\*\*) Reference Norms: IP67 (DIN EN 60529), IP69K (ISO 20653:2013), IK06



|                                 | LED39S |      |      |     | LED50S |      |     |                     | LED70S |      |     |  |
|---------------------------------|--------|------|------|-----|--------|------|-----|---------------------|--------|------|-----|--|
|                                 | PSU    | PSU  | PSD  | WIA | PSU    | PSD  | WIA |                     | PSU    | PSD  | WIA |  |
| I peak [A]                      | 19.1   | 19.1 | 23.1 | 19  | 27.2   | 25.1 | 19  |                     | 27.2   | 25.1 | 19  |  |
| Tref [us]                       | 263    | 263  | 221  | 230 | 274    | 214  | 230 | Max. Nr of products |        |      |     |  |
| Drivers / MCB 16A type B [max.] | 24     | 24   | 32   | 24  | 21     | 21   | 24  |                     |        |      |     |  |
| Drivers / MCB 10A type B [max.] | 15     | 15   | 13   | 15  | 13     | 13   | 15  |                     |        |      |     |  |
| Drivers / MCB 16A type C [max.] | 40     | 40   | 37   | 40  | 35     | 35   | 40  |                     |        |      |     |  |
| Drivers / MCB 10A type C [max.] | 24     | 24   | 22   | 24  | 21     | 21   | 24  |                     |        |      |     |  |

Rated lumen output in emergency mode by emergency unit: min 750lm



For PSD product series, rated light output in DC emergency mode:  
The luminaire is working on 15% of the normal mode of luminous flux by 220-240V DC supply.  
Refer to datasheet for detailed specification information.



This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle irresponsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

© 02/2026 Signify Holding.

All rights reserved. This document contains information relating to the product portfolio of Signify which information may be subject to change. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

Signify Holding.  
The Netherlands




PHILIPS

Coreline tubular  
waterproof

WT210C G2



|                                         | System light output (lm) | Colour temperature (K) | Power (W) | Energy efficiency class of light source | kg   | Surge rating |
|-----------------------------------------|--------------------------|------------------------|-----------|-----------------------------------------|------|--------------|
| WT210C G2 LED50S/840 PSU TW1 PMMA L1200 | 5000                     | 4000                   | 31        | D                                       | 1.45 | 2KV/4KV      |
| WT210C G2 LED39S/840 PSU TW1 PMMA L1500 | 3900                     | 4000                   | 26        | D                                       | 1.65 | 2KV/4KV      |
| WT210C G2 LED70S/840 PSU TW1 PMMA L1500 | 7000                     | 4000                   | 43.5      | D                                       | 1.65 | 2KV/4KV      |
| WT210C G2 LED50S/840 PSD TW1 PMMA L1200 | 5000                     | 4000                   | 31        | D                                       | 1.50 | 1KV/2KV      |
| WT210C G2 LED70S/840 PSD TW1 PMMA L1500 | 7000                     | 4000                   | 43.5      | D                                       | 1.75 | 1KV/2KV      |
| WT210C G2 LED50S/840 WIA TW1 PMMA L1200 | 5000                     | 4000                   | 31        | D                                       | 1.45 | 1KV/2KV      |
| WT210C G2 LED70S/840 WIA TW1 PMMA L1500 | 7000                     | 4000                   | 43.5      | D                                       | 1.65 | 1KV/2KV      |

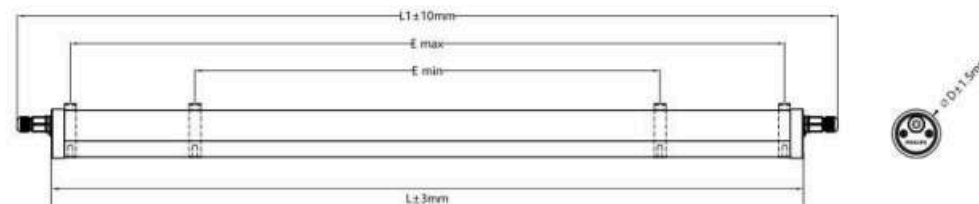

| Luminaire type  | Dimension (mm) |      |       |       |    |
|-----------------|----------------|------|-------|-------|----|
|                 | L              | L1   | E min | E max | D  |
| WT210C G2 L1200 | 1205           | 1310 | 745   | 1145  | 79 |
| WT210C G2 L1500 | 1505           | 1610 | 1045  | 1445  |    |

#### Order separate accessories

| Suspension mounting set (Indoor) | Suspension mounting set (Indoor/Outdoor) |
|----------------------------------|------------------------------------------|
| 2x  2x<br>2x  2x<br>2x  2x       | <br>2x  2x                               |
| 911401828188<br>WT210Z G2 SW2    | 911401828288<br>WT210Z G2 SC             |

Printed in China  
Data subject to change without notice  
Keep for future reference: [www.philips.com/lighting](http://www.philips.com/lighting)

© 02/2026, Signify Holding All rights reserved

