



|                                        | Power | Lumen | Energy efficiency class of Light source | Emergency unit (optional) | Max. interconnected number |
|----------------------------------------|-------|-------|-----------------------------------------|---------------------------|----------------------------|
| WT120C G3 20S/840 PSR MDUPHW L600      | 14    | 2170  | C                                       | No                        | 0.87                       |
| WT120C G3 27S/840 PSR MDUPHW L1200     | 17    | 2700  | C                                       | Yes                       | 1.34                       |
| WT120C G3 40S/840 PSR MDUPHW L1200     | 25    | 4000  | C                                       | Yes                       | 1.34                       |
| WT120C G3 34S/840 PSR MDUPHW L1500     | 21.5  | 3400  | C                                       | Yes                       | 1.70                       |
| WT120C G3 60S/840 PSR MDUPHW L1500     | 37.5  | 6000  | C                                       | Yes                       | 1.70                       |
| WT120C G3 80S/840 PSR MDUPHW L1500     | 50    | 8000  | C                                       | Yes                       | 1.70                       |
| WT120C G3 27S/840 PSR MDUPHW TW3 L1200 | 17    | 2700  | C                                       | Yes                       | 1.49                       |
| WT120C G3 40S/840 PSR MDUPHW TW3 L1200 | 25    | 4000  | C                                       | Yes                       | 1.49                       |
| WT120C G3 34S/840 PSR MDUPHW TW3 L1500 | 21.5  | 3400  | C                                       | Yes                       | 1.90                       |
| WT120C G3 60S/840 PSR MDUPHW TW3 L1500 | 37.5  | 6000  | C                                       | Yes                       | 1.90                       |

\*Refer to the datasheet for detailed information on through wiring options.


PSR

| Type            | Dimension (mm) |      |    |    |       |       |    | Nr of clips |
|-----------------|----------------|------|----|----|-------|-------|----|-------------|
|                 | A              | B    | C  | D  | E min | E max | F  |             |
| WT120C G3 L600  |                | 665  |    |    | 308   | 512   |    | 6           |
| WT120C G3 L1200 | 76             | 1215 | 80 | 38 | 538   | 1062  | 85 | 10          |
| WT120C G3 L1500 |                | 1515 |    |    | 838   | 1362  |    | 12          |





PSR TW3

Technical drawing of the PSR TW3 cable assembly. The drawing shows a side view of the cable with various dimensions labeled: A (total length), B (distance from end to first clip), C (clip width), D (clip height), E max (maximum cable diameter), E min (minimum cable diameter), and F (distance from end to last clip).




| Type                | Dimension (mm) |      |    |    |       |       |    | Nr. of clips |
|---------------------|----------------|------|----|----|-------|-------|----|--------------|
|                     | A              | B    | C  | D  | E min | E max | F  |              |
| WT120C G3 TW3 L1200 | 76             | 1235 | 80 | 38 | 538   | 1062  | 85 | 10           |
| WT120C G3 TW3 L1500 |                | 1535 |    |    |       |       |    |              |

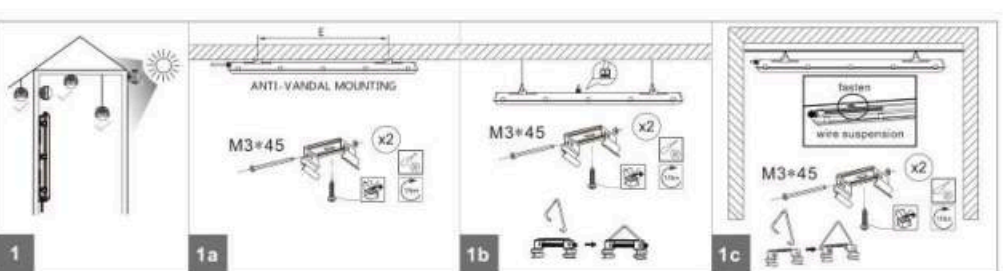




© 09/2026 Signify Holding. All rights reserved.

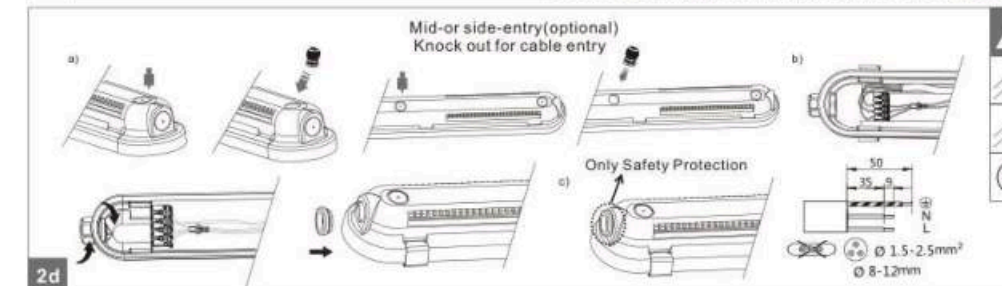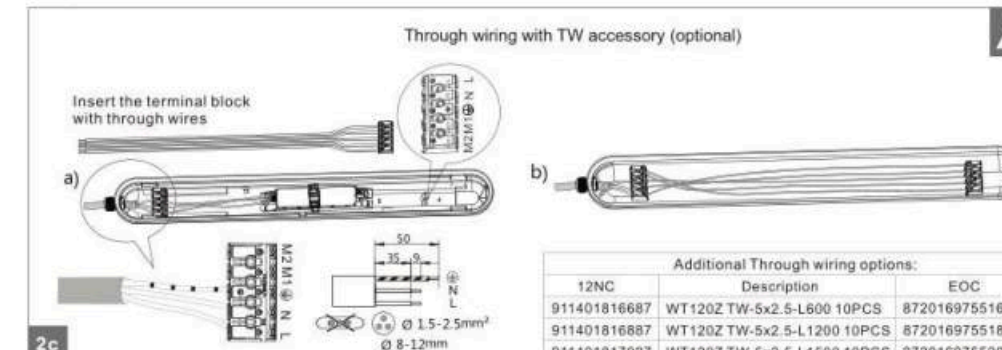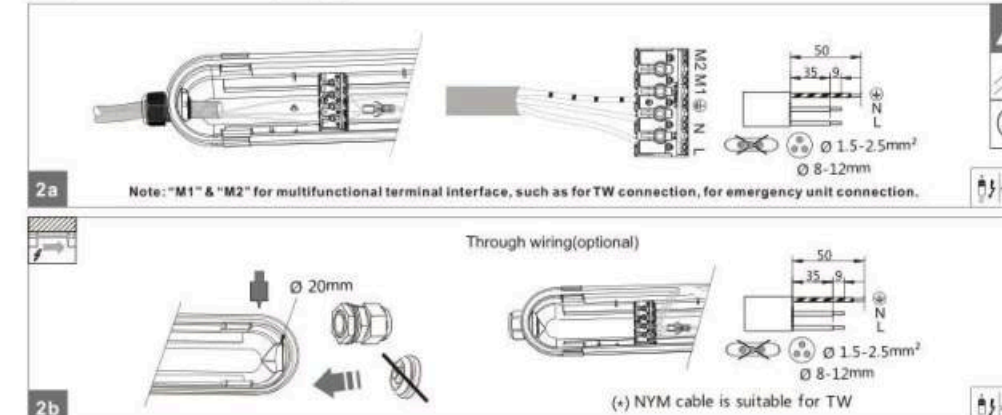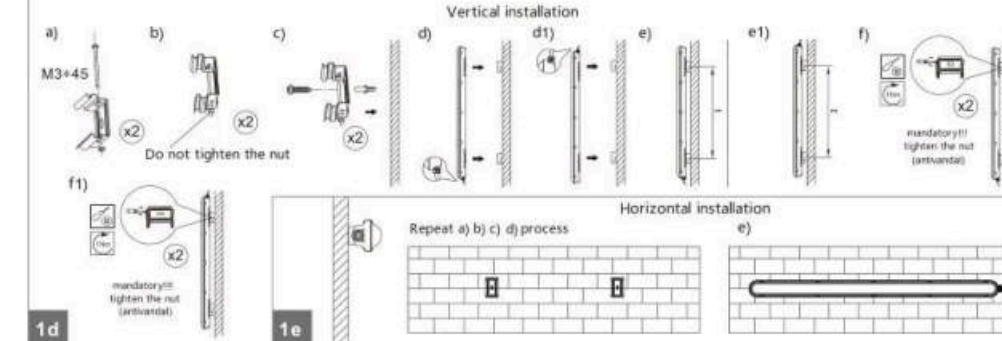





Data subject to change without notice. Keep for future reference. www.philips.com/lighting

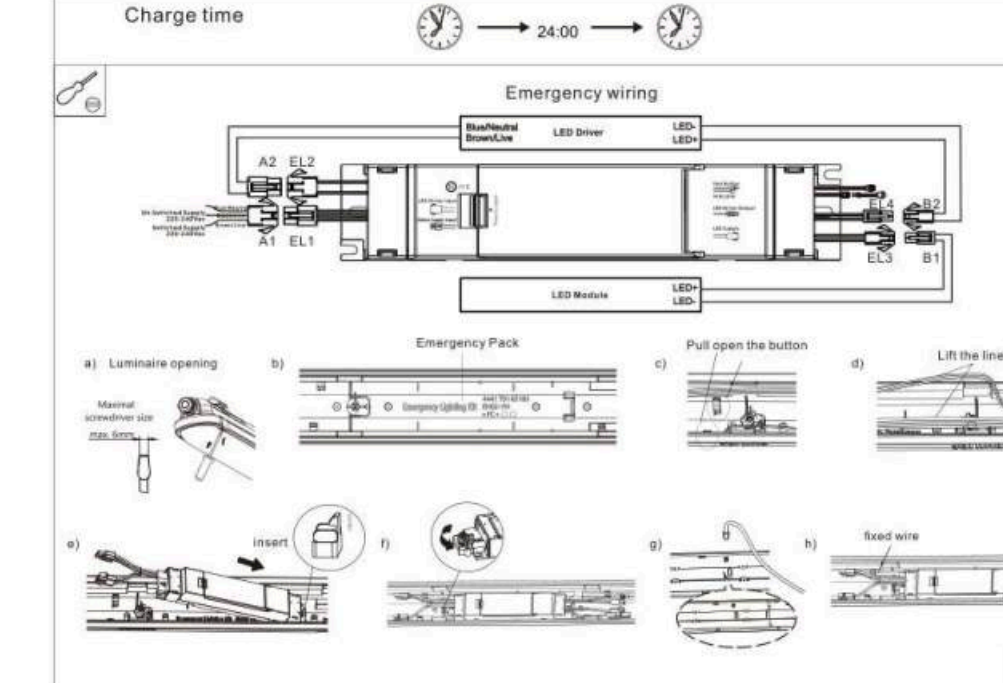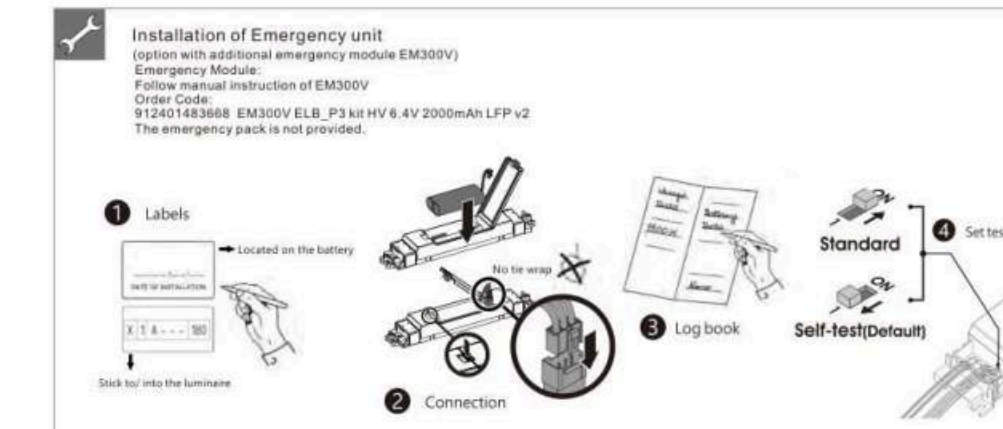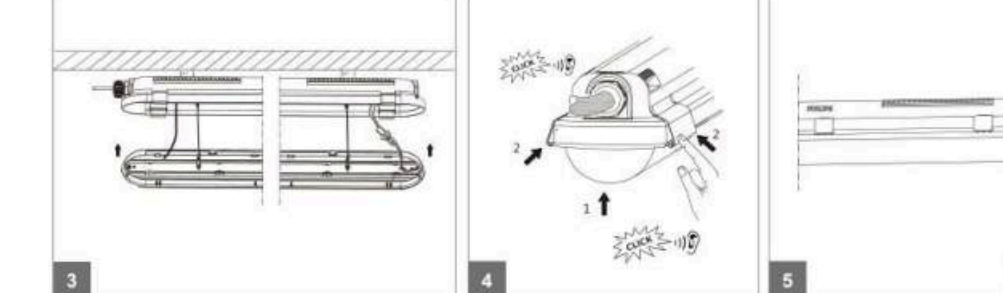






Data subject to change without notice. Keep for future reference. www.philips.com/lighting

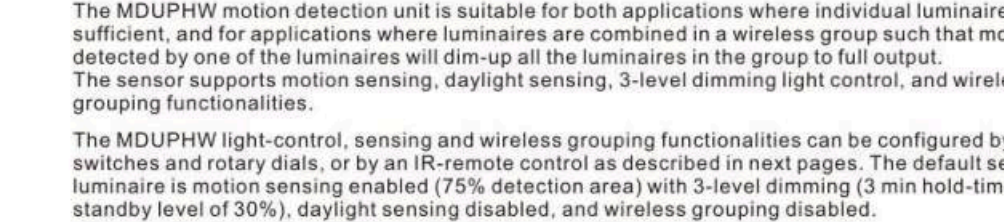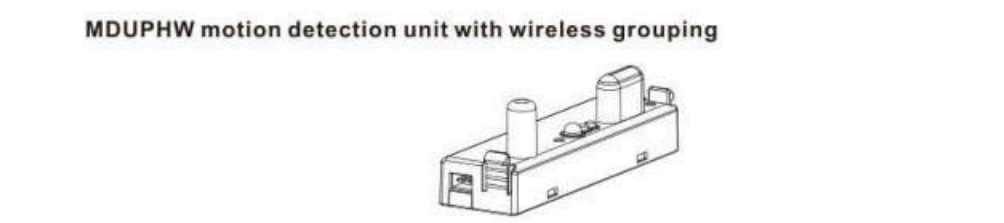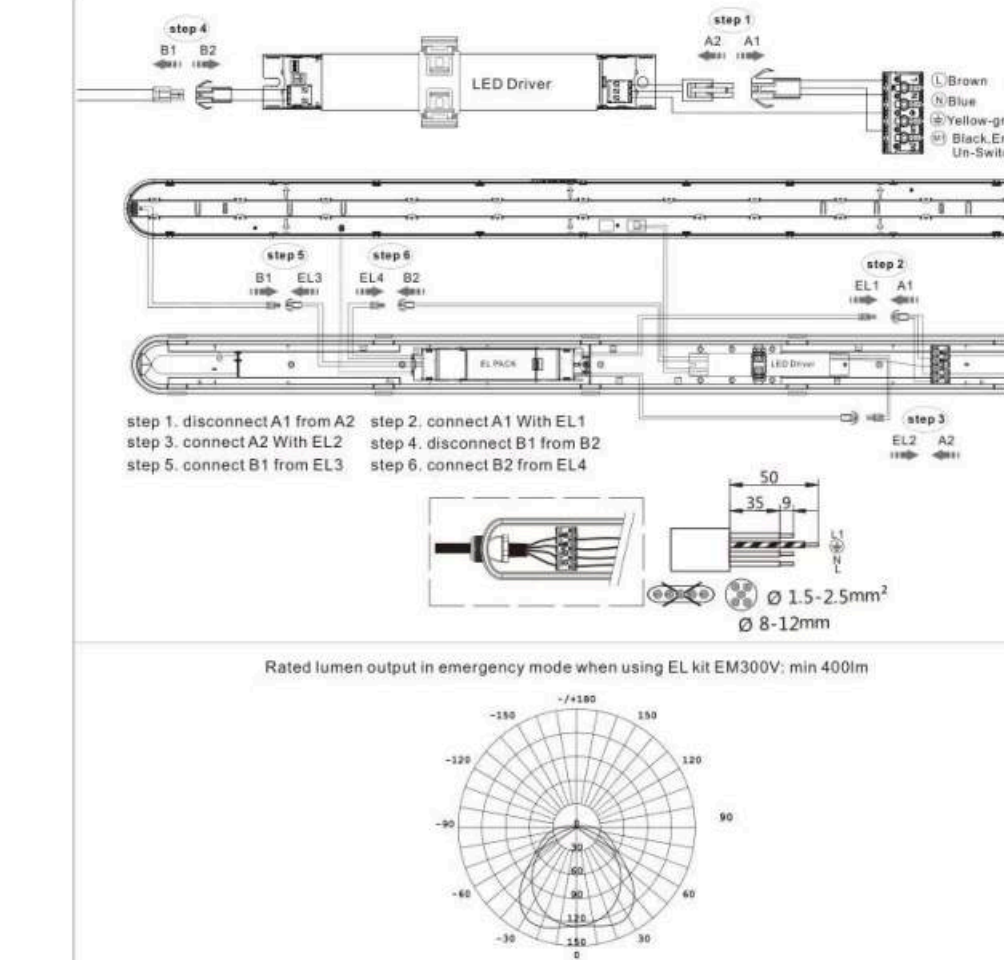






Data subject to change without notice. Keep for future reference. www.philips.com/lighting

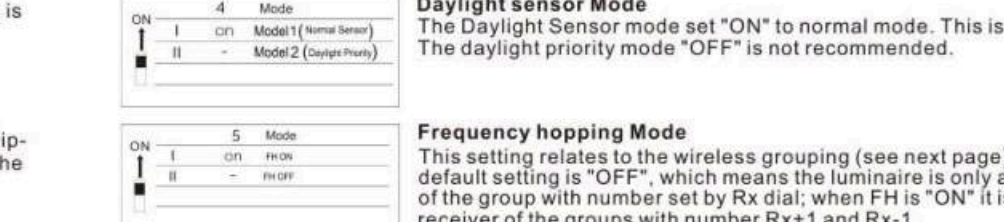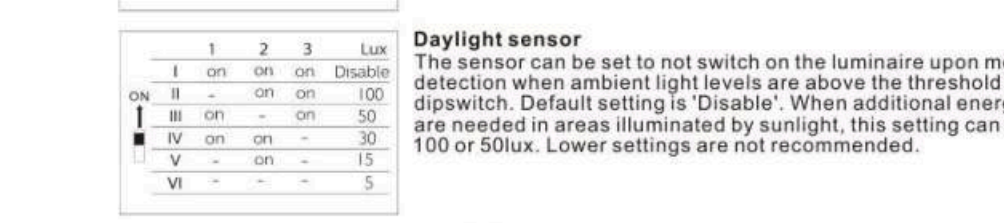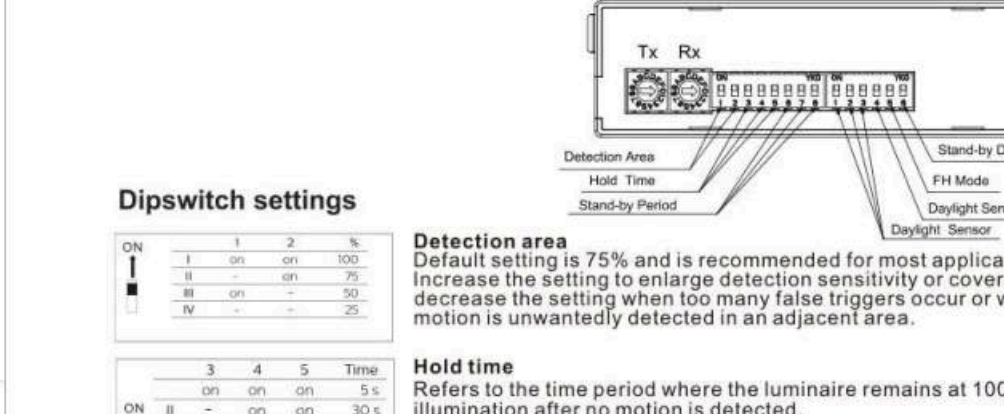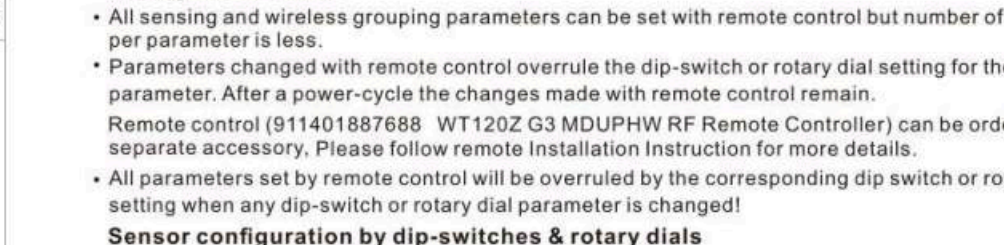





Data subject to change without notice. Keep for future reference. www.philips.com/lighting

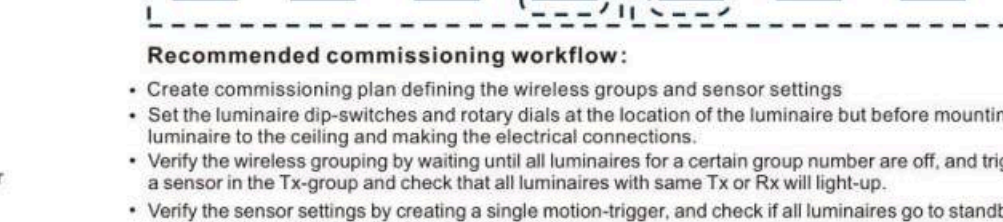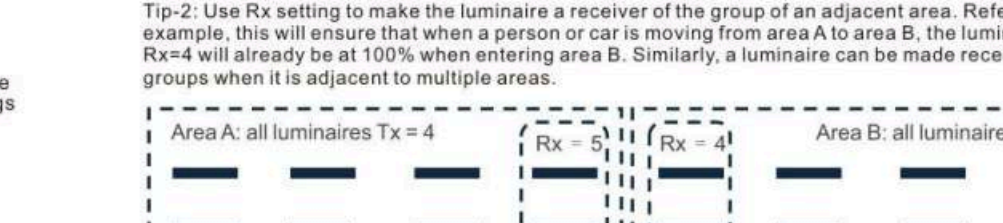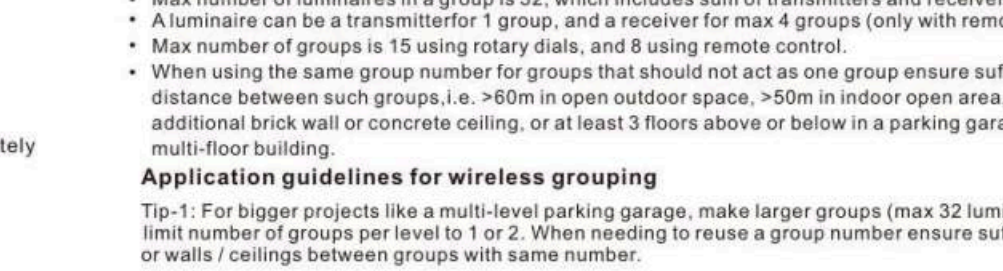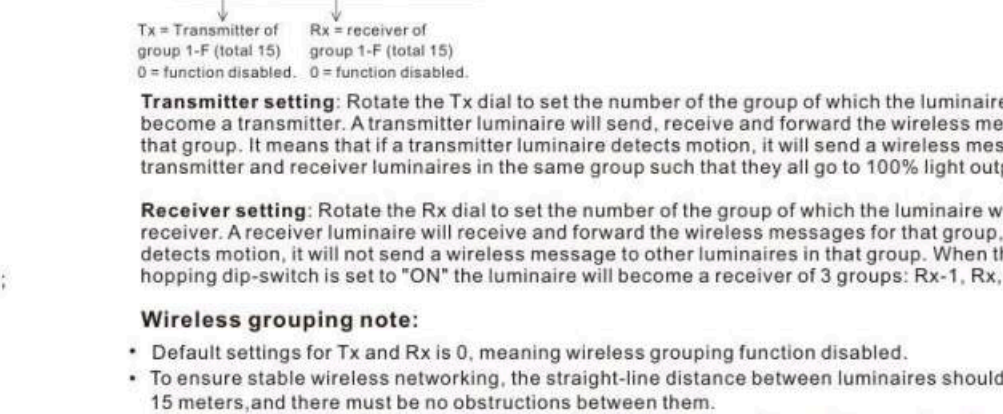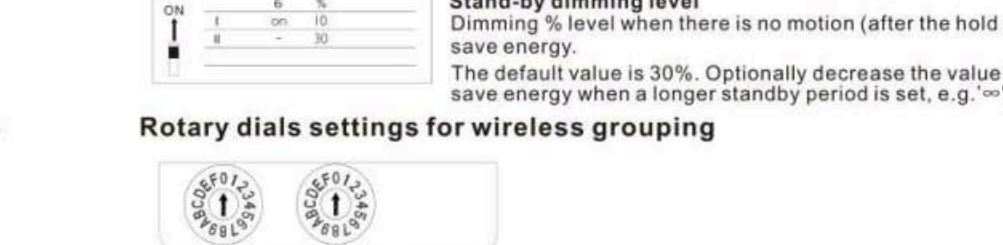

























Data subject to change without notice. Keep for future reference. www.philips.com/lighting

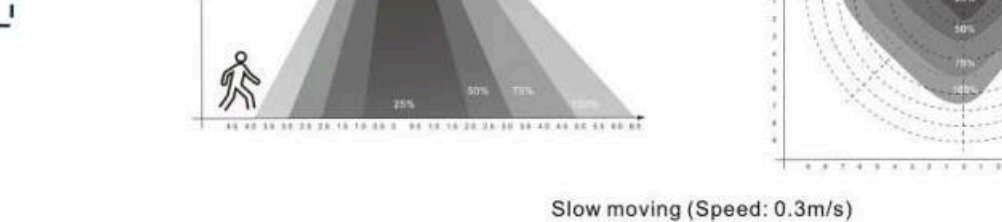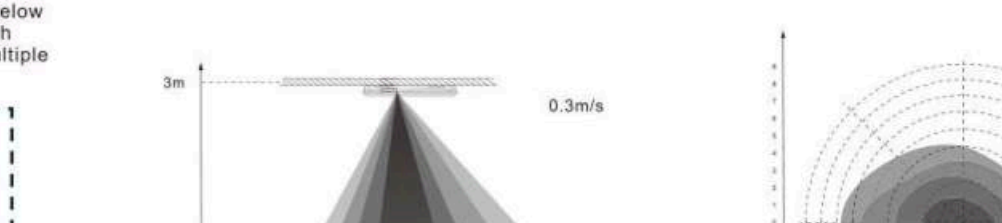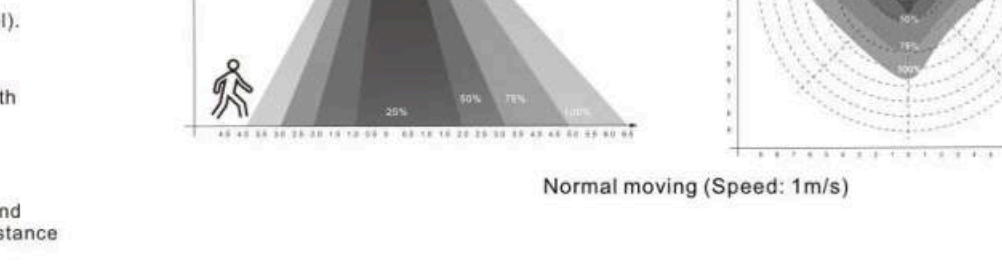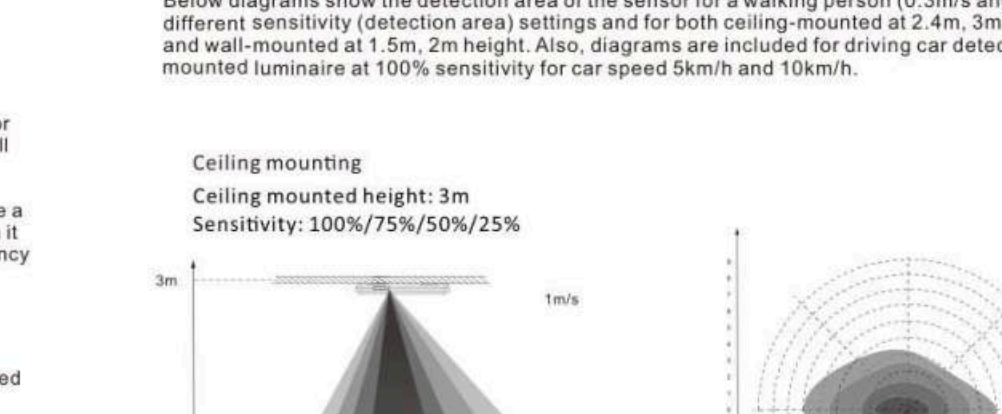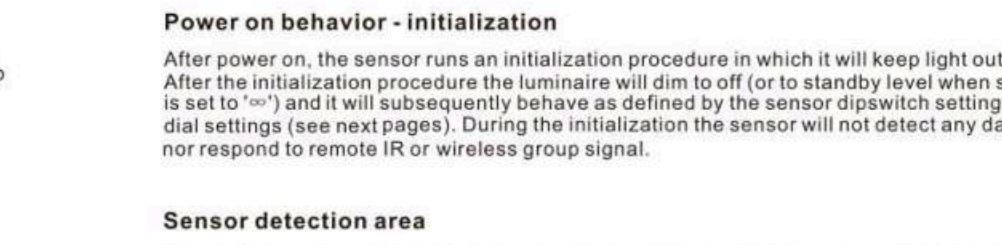

Data subject to change without notice. Keep for future reference. www.philips.com/lighting

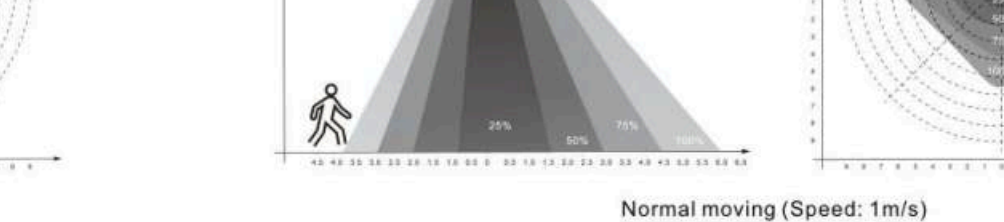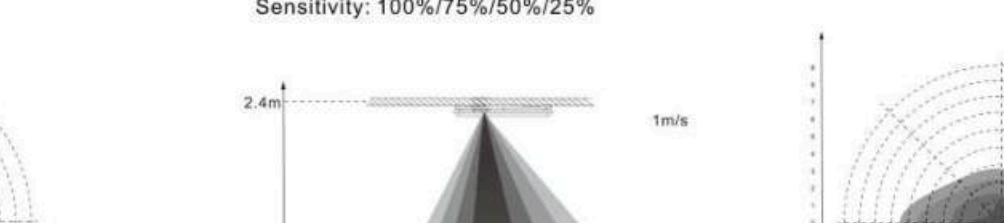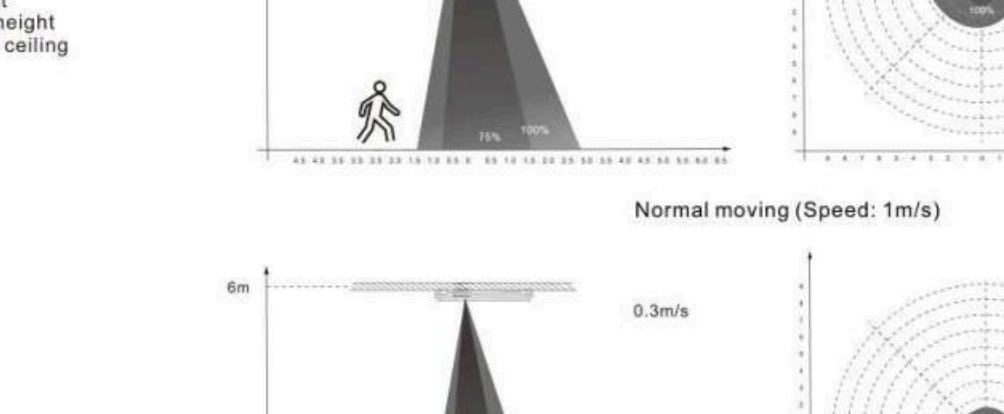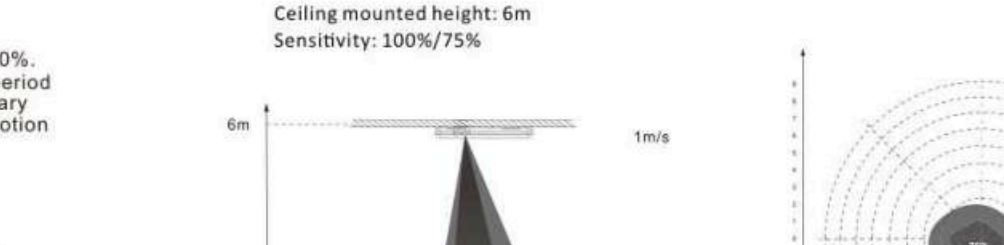

Data subject to change without notice. Keep for future reference. www.philips.com/lighting

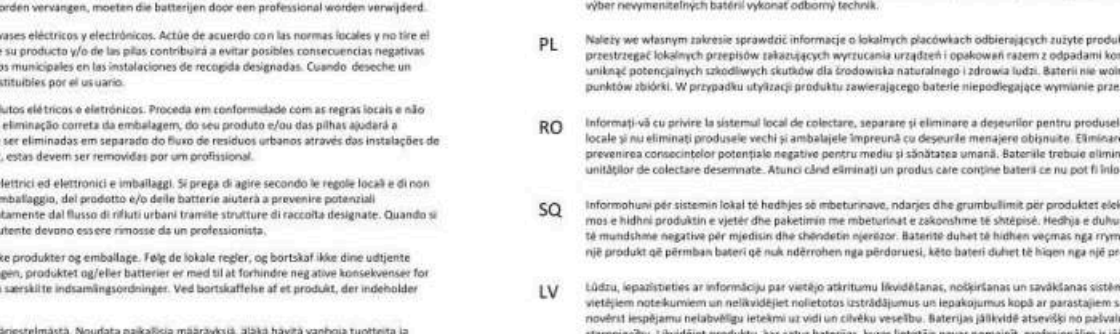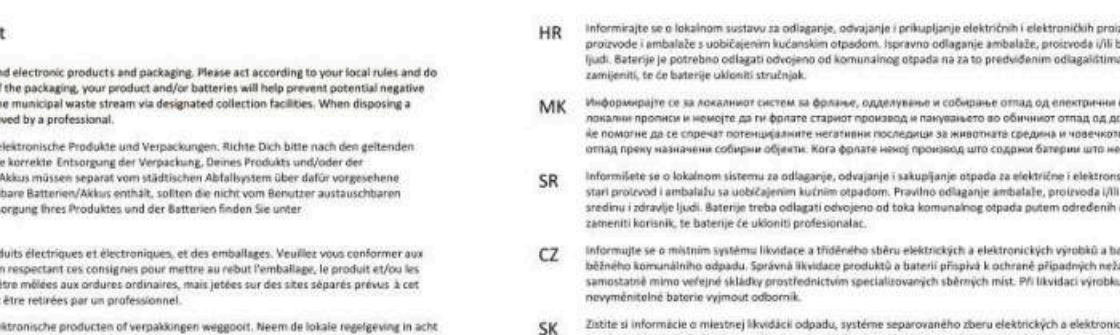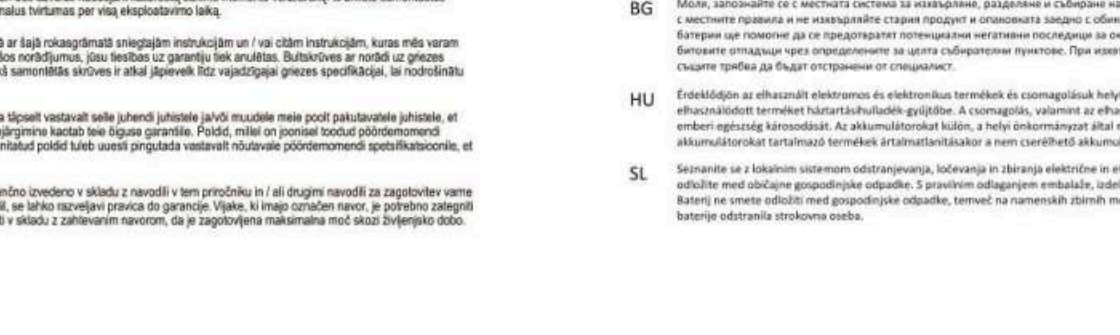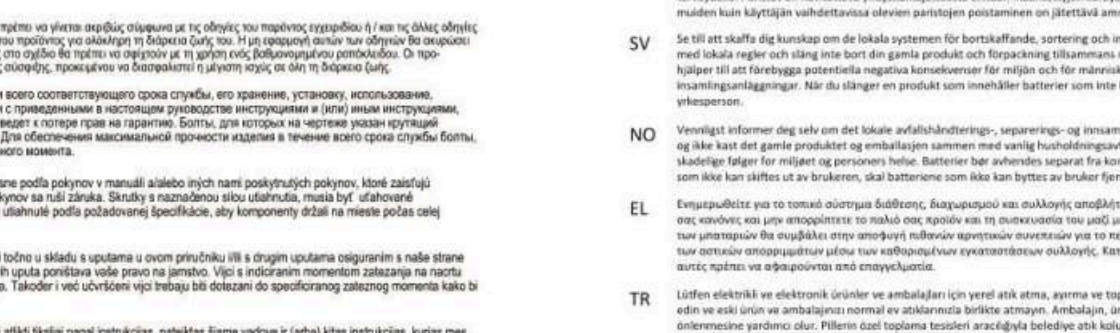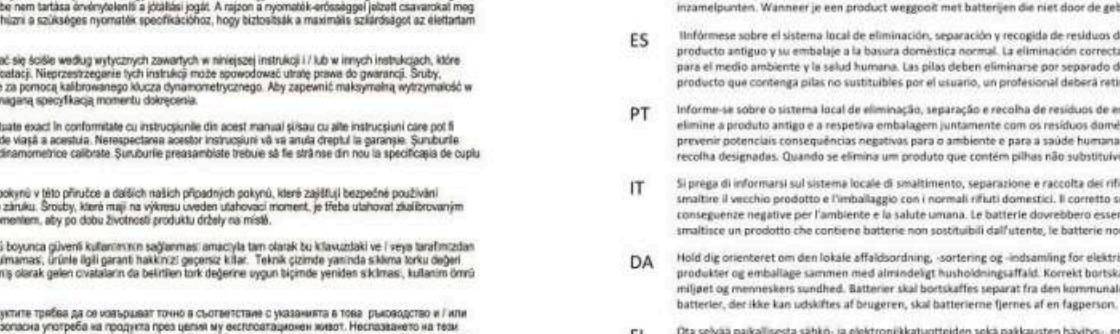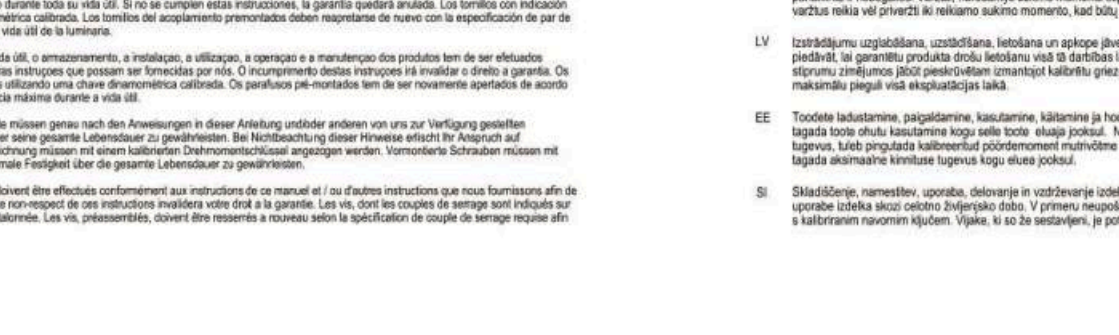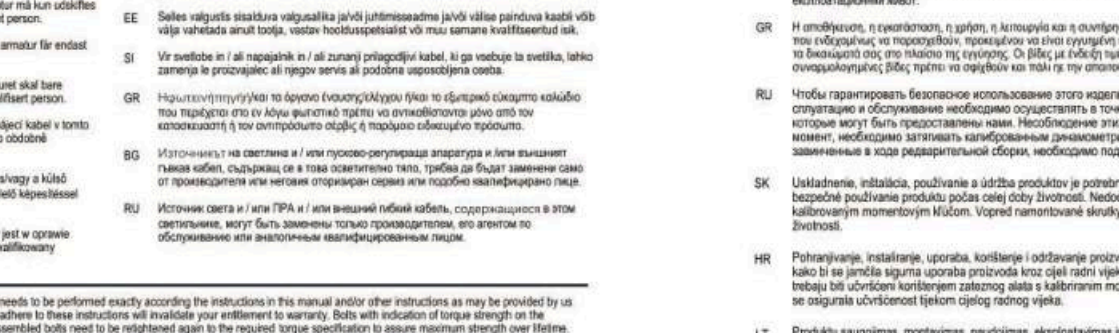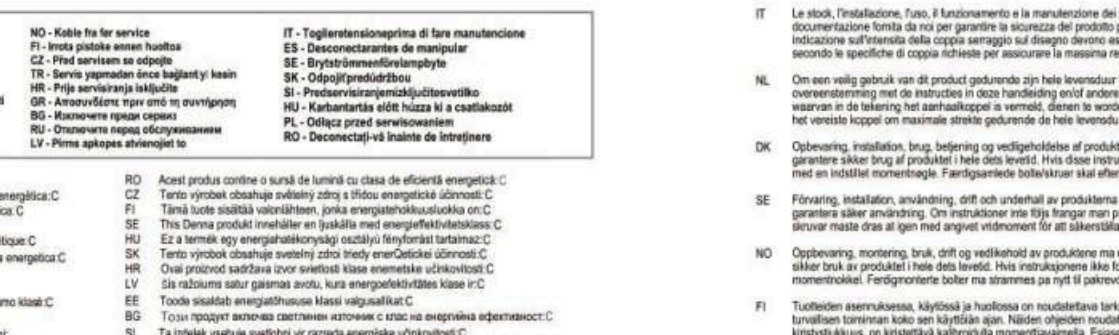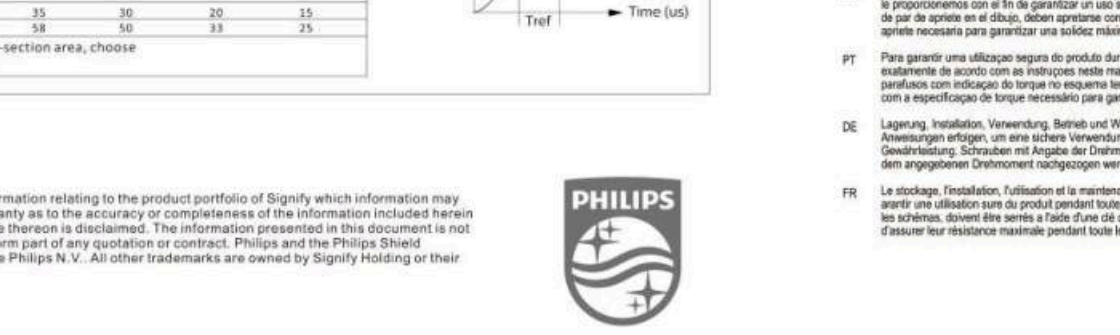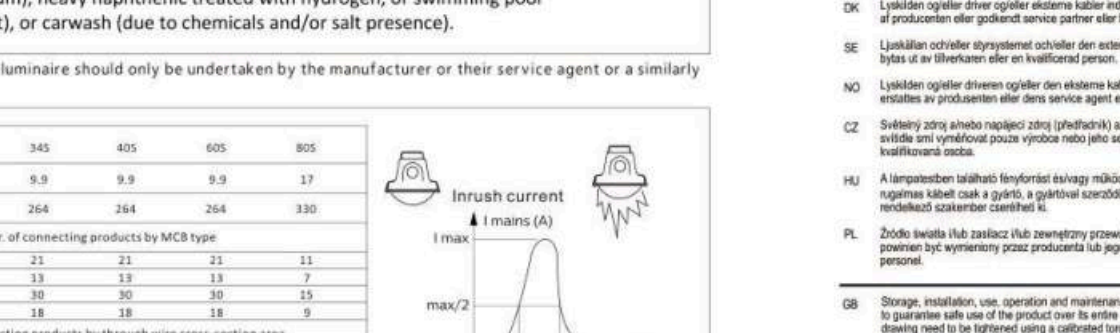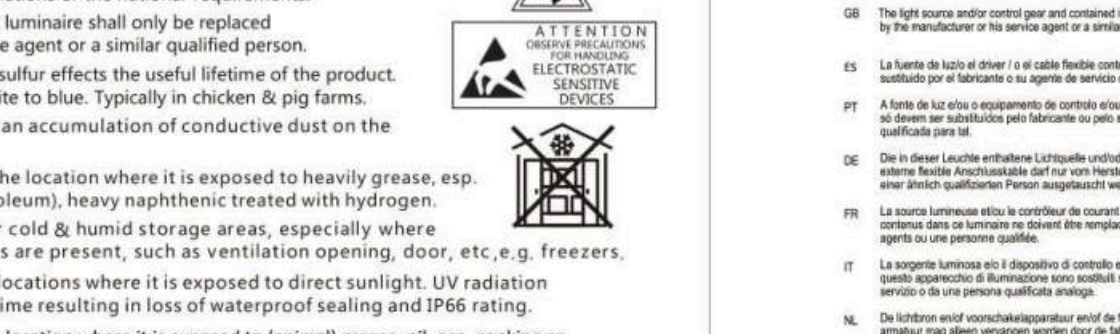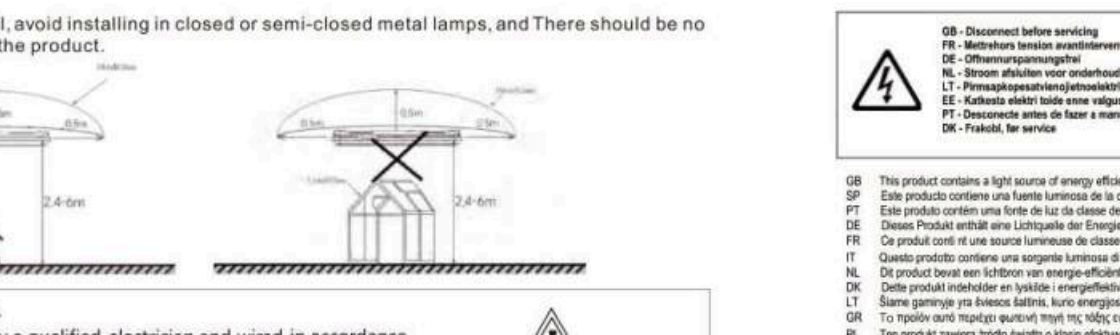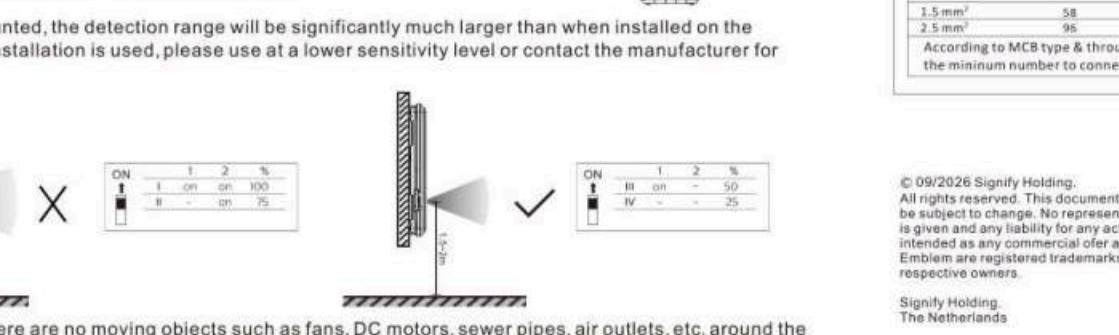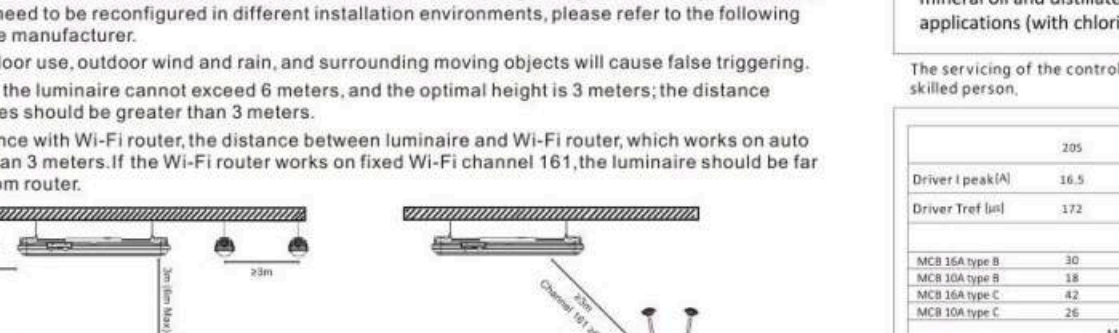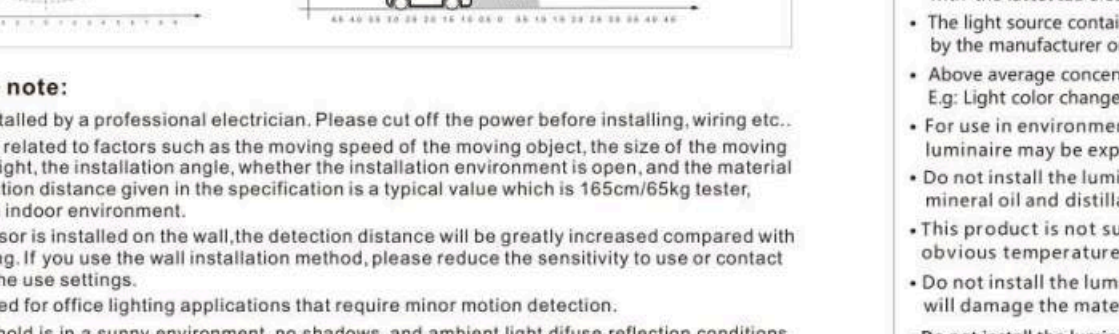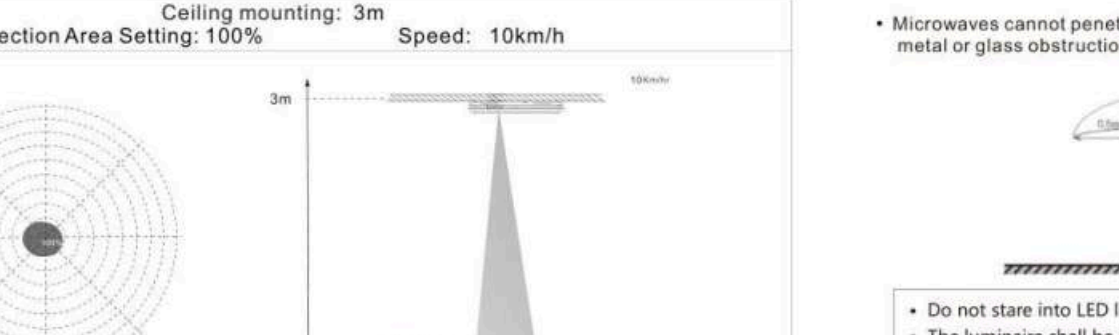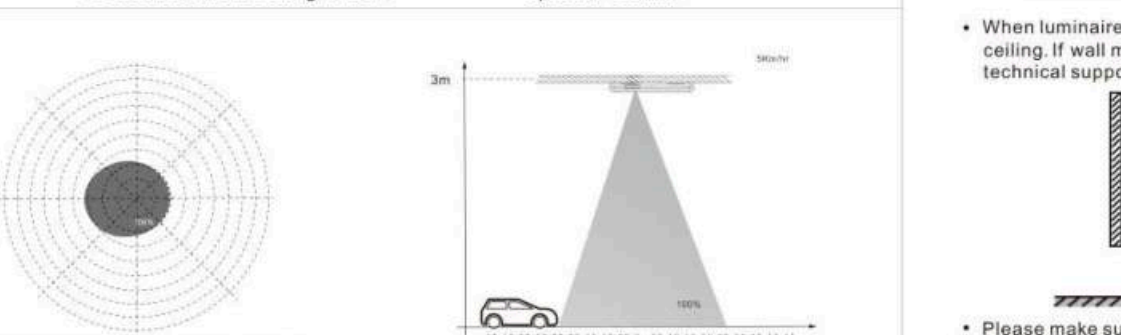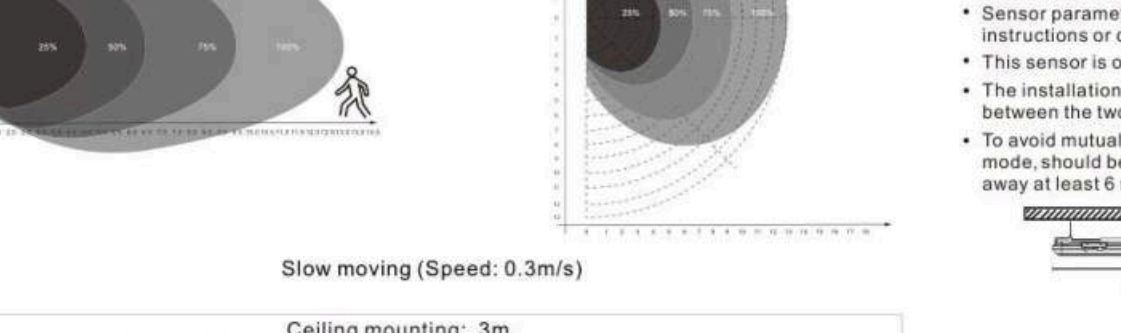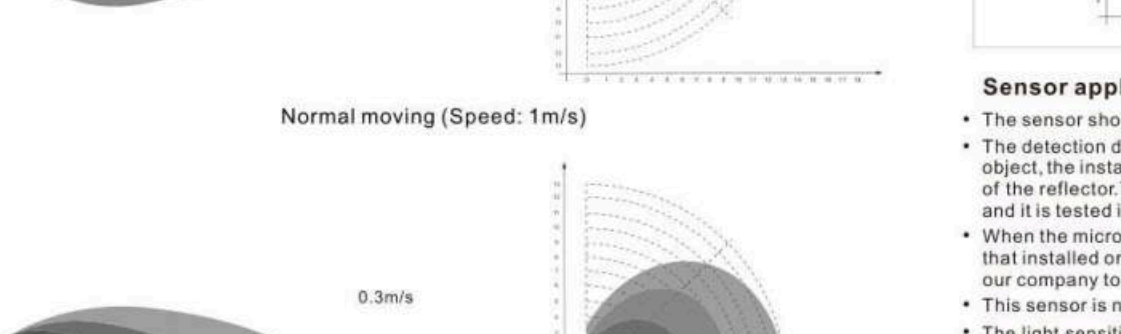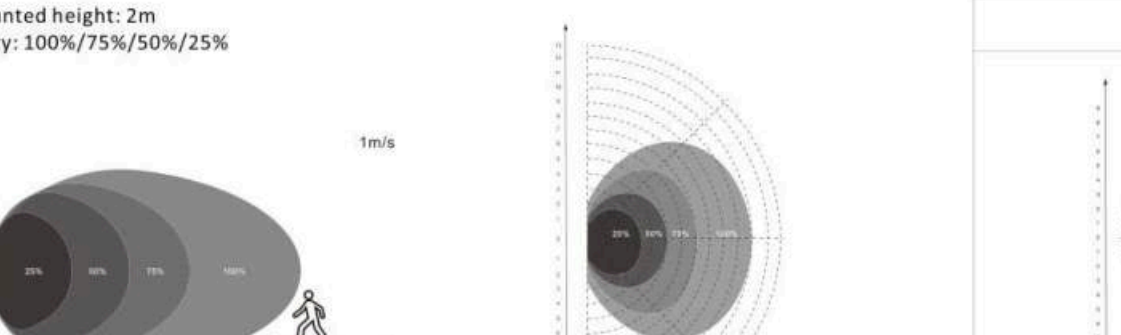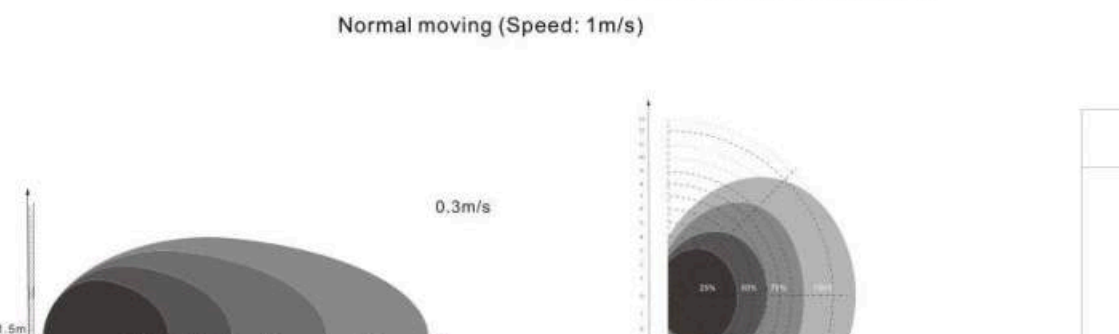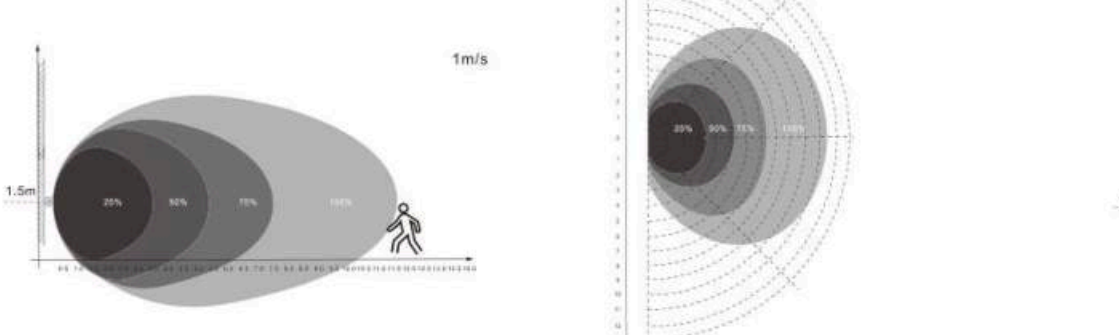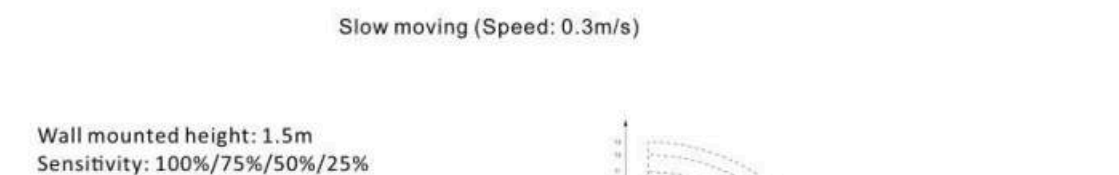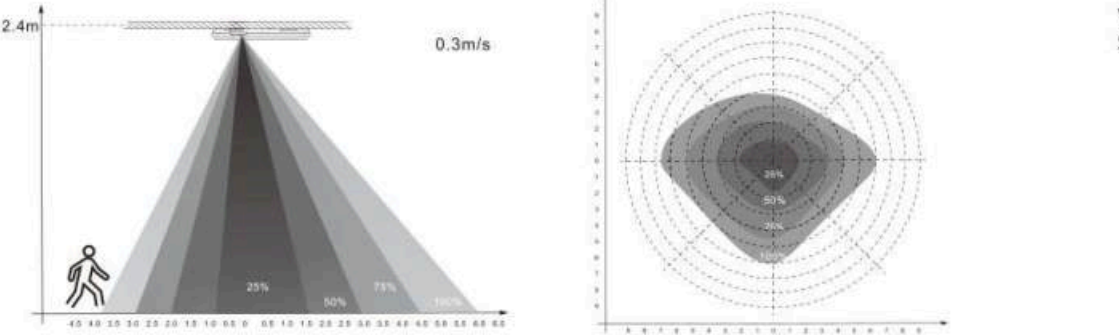

Slow moving (Speed: 0.3m/s)

Normal moving (Speed: 1m/s)

Normal moving (Speed: 1m/s)

Normal moving (Speed: 1m/s)

Normal moving (Speed: 1m/s)

Normal moving (Speed: 1m/s)

Normal moving (Speed: 1m/s)

Normal moving (Speed: 1m/s)

Slow moving (Speed: 0.3m/s)

Normal moving (Speed: 1m/s)

Normal moving (Speed: 1m/s)

Normal moving (Speed: 1m/s)

Normal moving (Speed: 1m/s)

Normal moving (Speed: 1m/s)

Normal moving (Speed: 1m/s)

Normal moving (Speed: 1m/s)