


PANEL LIGHT 1200x300

UGR<19 120 lm/W

Authorized Licensee for TOSHIBA trademark

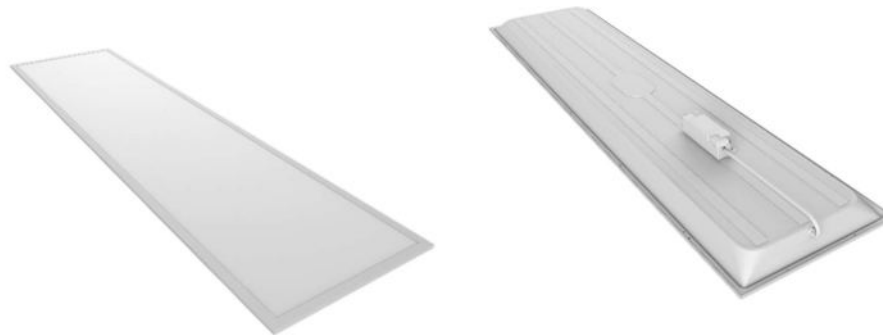

1. Specification:

A. General Data

Model	1200x300 mm 3000K	1200x300 mm 4000K	1200x300 mm 5000K	1200x300 mm 6500K
P/N	DELL-PL3403641U064	DELL-PL4403641U064	DELL-PL5403641U064	DELL-PLC403641U064
Rated Voltage	230 VAC	230 VAC	230 VAC	230 VAC
Frequency	50 Hz	50 Hz	50 Hz	50 Hz
Rated Wattage	36W	36W	36W	36W
Deviation Tolerance of Wattage	±10 %	±10 %	±10 %	±10 %
Power Factor	>0.9	>0.9	>0.9	>0.9
Rated Current	155 mA	155 mA	155 mA	155 mA
Maximum Input Current	200 mA	200 mA	200 mA	200 mA
Start On	<0.5S	<0.5S	<0.5S	<0.5S
Warm-up time up to 60% of the full light output	<1S	<1S	<1S	<1S
Dimmable	NO	NO	NO	NO
Unified Glare Rating Room dimensions of 4H/8H	<19	<19	<19	<19
Peak luminous intensity (cd)	1750	1750	1750	1750
Beam Angle (degrees)	90°	90°	90°	90°

R9 CRI	>1	>1	>1	>1
Survival factor	90%	90%	90%	90%
Displacement factor (cos φ1)	>0.9	>0.9	>0.9	>0.9
Stroboscopic effect metric (SVM) ≤ 0.9	0.1	0.1	0.1	0.1
Flicker metric (PstLM) ≤ 1	0.1	0.1	0.1	0.1
Energy Efficiency Class (EEC)	E	E	E	E
Safety requirements	CE	CE	CE	CE
Applicable Environments	IP40	IP40	IP40	IP40
Photobiological Group	RG0	RG0	RG0	RG0

B. Light Data

Color	Warm white	Neutral White	Daylight White	Cool White
Color Temperature (CCT)	3000K	4000K	5000K	6500K
Lumen Output* (φ120°)	3670 lm	3670 lm	3670 lm	3670 lm
Lumen Output* (φTotal)	4320 lm	4320 lm	4320 lm	4320 lm
Directional lamp	Yes	Yes	Yes	Yes
Beam angle correspondence*	Wide cone	Wide cone	Wide cone	Wide cone
Light source type	Directional (DLS) not operating on mains (NMLS)			
Color Rendering Index	≥ 80			
Efficacy(Useful)* ©	111 lm/W	111 lm/W	111 lm/W	111 lm/W
Efficacy(Total)*	120 lm/W	120 lm/W	120 lm/W	120 lm/W
Color Consistency**	6 Step MacAdam Ellipse (6 SDCM)			

*tolerance +/- 10%

** 3000K center point (0.43387, 0.40319) ; 4000K center point (0.38177, 0.37959) ; 5000K center point (0.34464, 0.35506) ; 6500K center point (0.31230, 0.32825)

© Efficacy(Useful) = (φ use / Pon) x FTM

★ Sphere : non-directional · Wide cone : Bean angle ≥ 90°(Φ120°, in a 120° cone) · Narrow cone :Bean angle < 90°(Φ90°, in a 90° cone)

C. Lifetime

(Supplied Voltage:AC230V; Ambient Temperature: 25°C)

Lumen Maintenance Factor	70%of the rated lifetime
Rated Lifetime – L_{70B50}	25,000 hrs
Lumen Maintenance factor	95.8%

D. Temperature Operation

Normal operation temperature	-10°C ~ 45°C
Relative Humidity	10%~ 90%

E. Geometric Data

Model	Panel 1200x300 UGR19 120lm/W
Maximum Length	1195 ± 2 mm
Maximum width	295 ± 2 mm
Maximum thickness	34 ± 2 mm
Mass	1.5 kg ± 10%


F. Environmental relevant materials

Mercury (Hg)	Comply with RoHS Directive 2011/65/EU
Lead (Pb)	
Cadmium(Cd)	
Hexavalent Chromium(Cr6+)	
Polybrominated Biphenyls(PBBs)	
Polybrominated Diphenyl Ethers(PBDEs)	
Bis (2-ethylhexyl) phthalate(DEHP)	
Butyl benzyl phthalate(BBP)	
Dibutyl phthalate(DBP)	
Diisobutylphthalate(DIBP)	

2. Outline Drawing


Unit : mm


Model NO.	Size A(mm)	Size B(mm)	Size C(mm)
DELL- PLx403641U054	1195	295	34

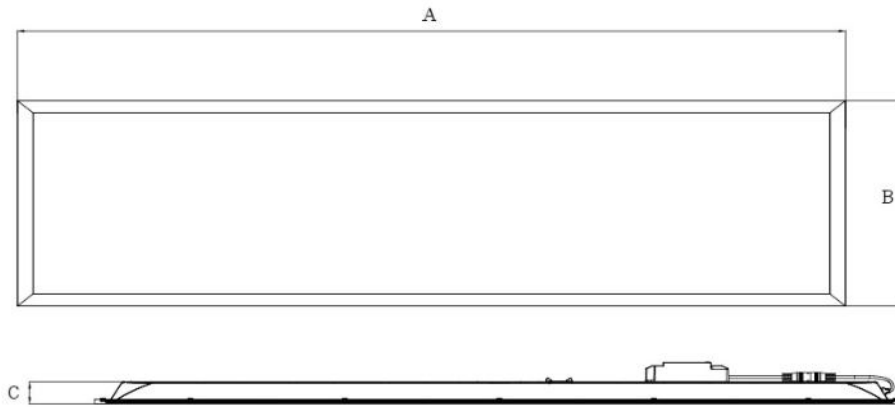

3. Light Distribution Curve


Full width at half maximum (FWHM) : 90°

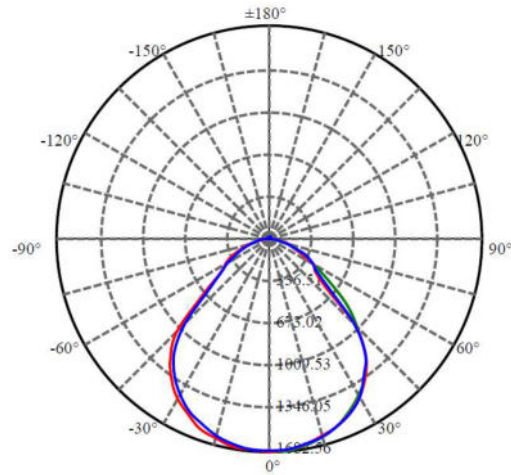

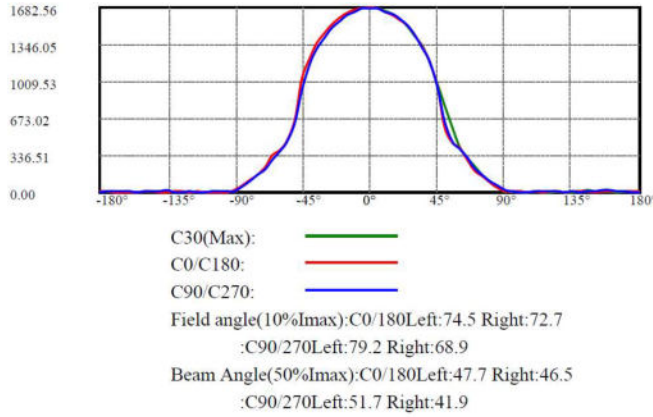


4. Spectrum Distribution


3000K Color Temperature

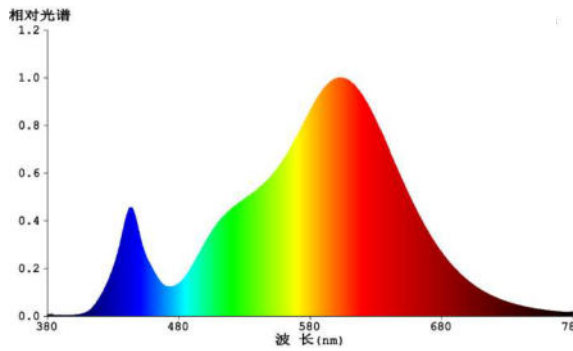


4000K Color Temperature

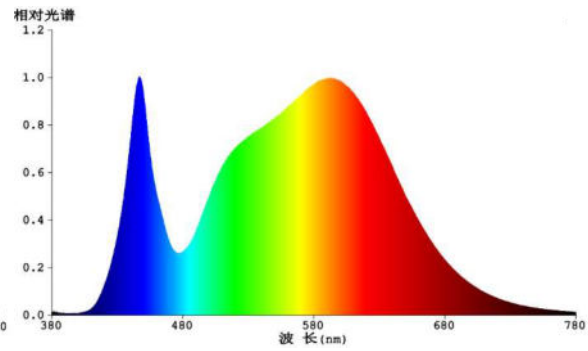

5000K Color Temperature

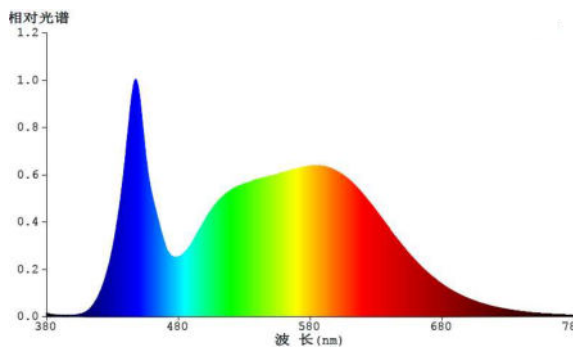

6500K Color Temperature

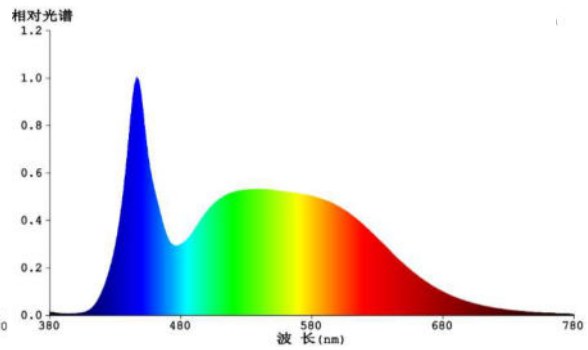

5. Warnings

- Before replacing, turn off power and let lamp cool to avoid electrical shock or burn.
- Before opening the package, please check if there's damage or defect during transportation, if damage occurs, please don't use it and inform your supplier immediately.
- Please do not attempt to use a damaged product.
- The product should be installed, dismantled and maintained by a qualified electrician; Suppliers don't take charge of any problems or damages that occur due to mishandling such as an operation not permitted in this manual.

- Choose an install place where can withstand 10 times the weight of the product to ensure a solid installation.
- Wipe the veil with soft cloth dipped a little neutral detergent, be sure not to use any sandpaper, polishing powder or alcohol, gasoline and so on liquor.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.

6. Cautions

Only to apply in dry and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space). Not intended for use with emergency light fixtures for exit lights.

7. Notes

All characteristics are estimated at room temperature (25°C), free air burning, base up burning position and at rated voltage. In view of the complex manufacturing process for light above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technic individual products may vary from the typical values.

8. Logistic information

Model	1200x300 mm 3000K	1200x300 mm 4000K	1200x300 mm 5000K	1200x300 mm 6500K
Pieces per pack	1	1	1	1
EAN code on pack	4711112387779	4711112387786	4711112387793	4711112387809
Size of pack	123*30*3.8 cm	123*30*3.8 cm	123*30*3.8 cm	123*30*3.8 cm
Weight per pack (G.W)	N/A	N/A	N/A	N/A
Packs per inner box	N/A	N/A	N/A	N/A
EAN code on inner box	N/A	N/A	N/A	N/A
ITF code on inner box	N/A	N/A	N/A	N/A
Size of inner box	N/A	N/A	N/A	N/A

Weight per inner box(G.W)	N/A	N/A	N/A	N/A
Packs per outer box	4	4	4	4
EAN code on outer box	N/A	N/A	N/A	N/A
ITF code on outer box	14711112387776	14711112387783	14711112387790	14711112387806
Size of outer box	128*17*35 cm	128*17*35 cm	128*17*35 cm	128*17*35 cm
Weight per outer box(G.W)	7.3 kg	7.3 kg	7.3 kg	7.3 kg

Packing Photograph

3000K



4000K



5000K



6500K

The image displays four sets of Toshiba Panel Light packaging, each corresponding to a different color temperature: 3000K (Warm White), 4000K (Neutral White), 5000K (Daylight), and 6500K. Each set includes a front view and a side view of the cardboard box. The front view shows the Toshiba logo, 'PANEL LIGHT UGR<19 1200x300', '36w', '3670lm', '4320lm', and 'LED' icons. The side view shows technical specifications and a barcode.







9. ERP Label

3000K

4000K

5000K

6500K

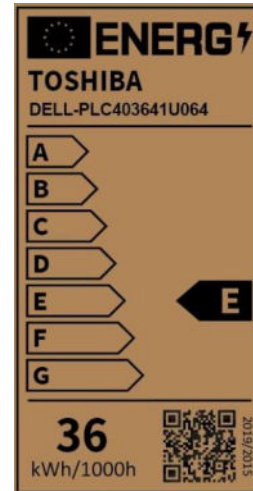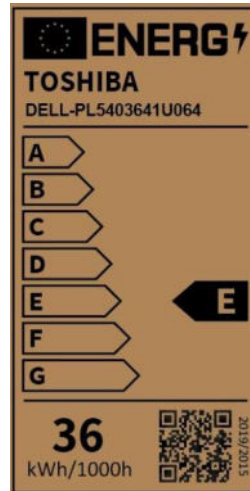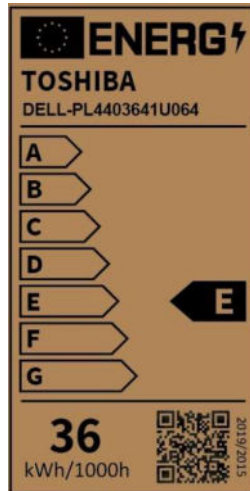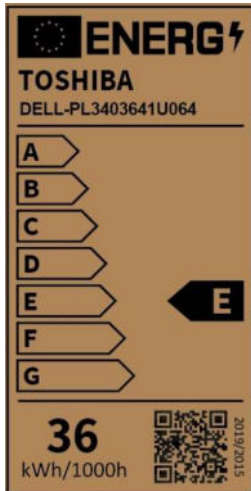

10. Conformity

<p>2014/35/EU; Low Voltage Directive</p>	<p>EN 60598-2-2:2012、EN60598-1:2015、EN60598-1:2015/A1:2018、 EN62471:2008、EN 62493:2015、IEC/TR 62778: 2014</p>
<p>2014/30/EU; EMC Directive</p>	<p>EN 55015: 2020、EN 61000-3-2:2021、EN 61000-3-3: 2013/A1:2019 EN 61547:2009</p>
<p>2009/125/EC; ErP Directive</p>	<p>(EU) 2019/2015、(EU) 2019/2020、(EU) 2021/340、(EU) 2021/341</p>
<p>2011/65/EU+(EU)2015/863; RoHS Directive</p>	<p>EN 50581: 2012</p>

11. Applicable countries

Albania ,Austria , Belgium , Bulgaria , Croatia , Cyprus , Czech , Denmark , Estonia , Finland , France , Georgia
Germany ,Greece , Iceland , Ireland , Italy , Luxembourg , Malta , Morocco , Netherland , Norway , Portugal
Romania ,Serbia , Spain , Sweden , Switzerland , Tunisia ,U.K

Note : The requirement of each country will be reflected to the product specifications, when the products will be shipped to
such
country.

12. Manufacturer

EPILEDS TECHNOLOGIES, INC.